



How to Upload Custom Sound of Audible Alarm

Title:	How to Upload Custom Sound of Audible Alarm	Version:	v1.0	Date:	04/09/2020
Product:	IP Camera			Page:	1 of 3

Preparation

1. Second generation AcuSense camera (-SL models).
2. Custom audio with .wav format sampling rate as 8 KHz.

How to Upload Custom Sound of Audible Alarm

1. Website upload

1) Find uploading page on web

Configuration---Event---Basic Event---Audible Alarm Output.

The screenshot displays the Hikvision web interface for configuring the Audible Alarm Output. The top navigation bar includes 'Live View', 'Playback', 'Picture', and 'Configuration'. The left sidebar lists various system settings, with 'Event' and 'Basic Event' highlighted. The main configuration area is titled 'Audible Alarm Output' and contains the following settings:

- Sound Type:** A dropdown menu set to 'Warning'.
- Warning:** A dropdown menu set to 'Siren' with a 'Test' button next to it.
- Alarm Times:** A text input field set to '5'.
- Sound Volume:** A slider control set to '80'.
- Arming Schedule:** A section with 'Delete' and 'Delete All' buttons, followed by a calendar grid showing alarm times for each day of the week (Mon-Sun) from 0 to 24 hours.
- Save:** A red button at the bottom right of the configuration area.

2) Select sound type.

Title:	How to Upload Custom Sound of Audible Alarm	Version:	v1.0	Date:	04/09/2020
Product:	IP Camera			Page:	2 of 3

The screenshot shows the 'Alarm Output' configuration page. On the left is a sidebar with navigation options: Local, System, Network, Video/Audio, Image, and Event. The 'Basic Event' section is expanded, showing 'Smart Event' and 'Storage'. The main content area has tabs for 'Motion Detection', 'Video Tampering', 'Alarm Input', 'Alarm Output', and 'Export'. Under 'Alarm Output', the 'Sound Type' dropdown is open, showing 'Warning' (selected), 'Prompt', and 'Custom'. The 'Warning' option is highlighted with a red box. The 'Alarm Times' is set to 5. The 'Sound Volume' is set to 80. The 'Arming Schedule' button is highlighted with a red box. Below the main settings, there are 'Delete' and 'Delete All' buttons, and a calendar view showing the arming schedule for Monday through Thursday.

3) Import custom audio file.

Click Add, then upload a .wav **mono sound** audio file with the size smaller than **512 KB** and sampling rate as **8 KHz**.

If audio do not meet above requirements, it will prompt Uploading failed.

The screenshot shows the 'Custom' sound type configuration page. The 'Sound Type' dropdown is set to 'Custom'. The 'Custom' section has a 'Select File' button, a 'Test' button, a 'Download' button, and an 'Add' button. The 'Add' button is highlighted with a red box. The 'Alarm Times' is set to 5. The 'Sound Volume' is set to 80. The 'Arming Schedule' button is highlighted with a red box. Below the main settings, there are 'Delete' and 'Delete All' buttons.

Title:	How to Upload Custom Sound of Audible Alarm	Version:	v1.0	Date:	04/09/2020
Product:	IP Camera			Page:	3 of 3

Upload Custom Audio

* Custom

Rec 0001.wav

Browse

✓

?

Upload a .wav mono sound audio file with the size smaller than 512 KB and sampling rate as 8 KHz.

* Audio Name

Custom


✓


OK

Cancel

4) Test.

Save all settings and click Test, if prompt “Audio is playing...Please wait”, that means uploading succeed.

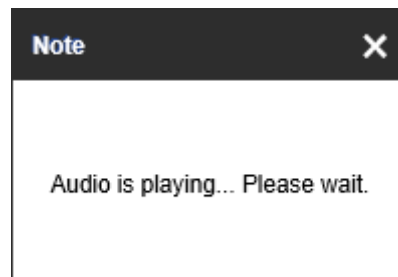

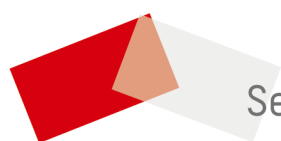

See Far, Go Further